

11/28/2017

## **COMFORT SLEEPER (Ver.8)**

### **DISASSEMBLY & REASSEMBLY INSTRUCTIONS**

The logo for American Leather, featuring a large, stylized white letter 'A' on the left, followed by the words 'AMERICAN LEATHER' in a smaller, white, sans-serif font. A registered trademark symbol (®) is located at the end of the word 'LEATHER'. The entire logo is set against a solid black rectangular background.

**A AMERICAN LEATHER®**

## DISASSEMBLY



Tools: 1/2" & 7/16" sockets, 7/16" wrench, wood block 5" tall, or mallet plus wood block = 5" (Impact driver optional)

High Leg Sleeper with "Ear" that extends over the arm



Open bed as shown




Tilt sofa forward onto its Front Arms

Low Leg Sleeper without "Ear"




Unhook Velcro holding Dust Cover to back edge of sofa  
(Low leg sleepers only)

## DISASSEMBLY

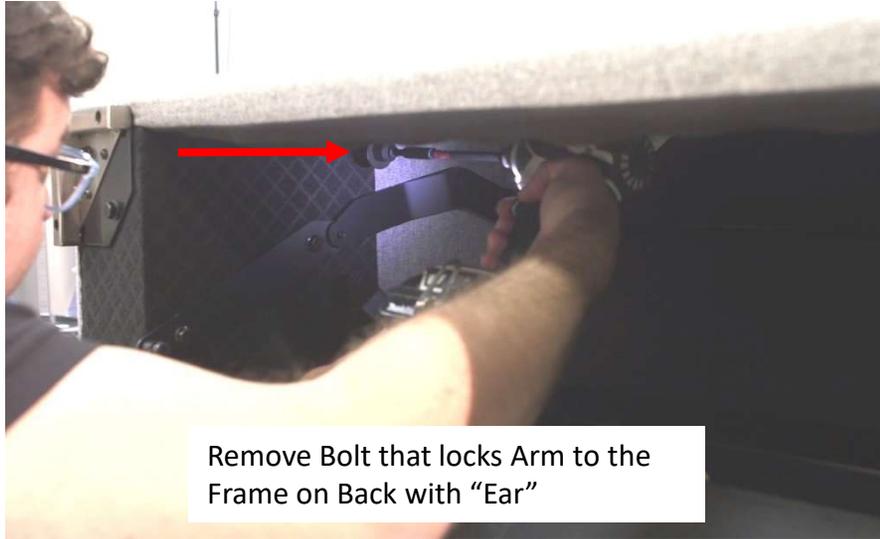


## DISASSEMBLY

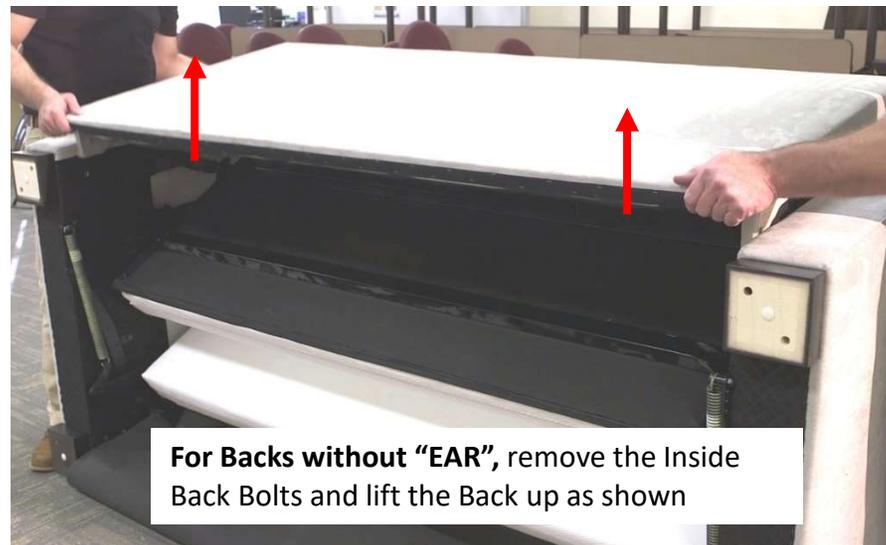

## DISASSEMBLY



Return the sofa back onto its legs.  
Remove Two Bolts from each side of the Middle  
Mattress Section.



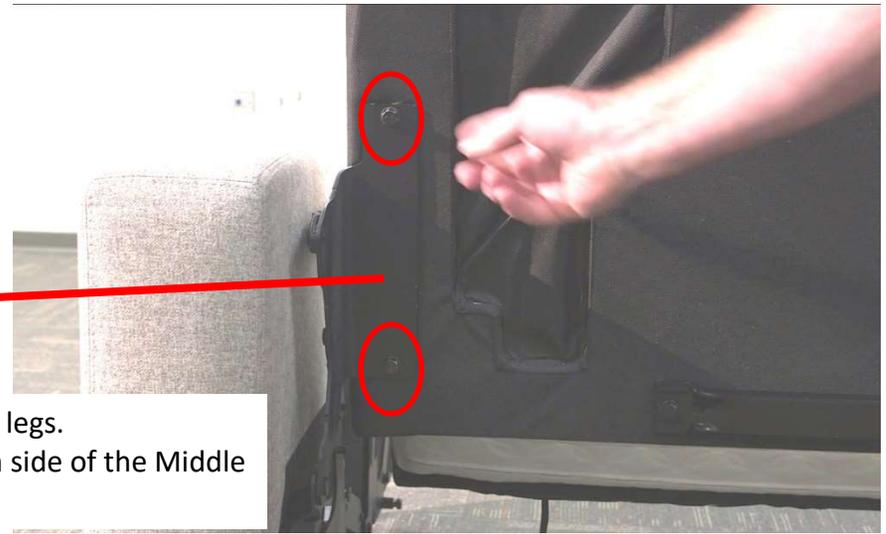


Lift Middle and Front Mattress Assembly away from the sofa  
and fold it on the floor





Close the Mechanism from both sides


## DISASSEMBLY

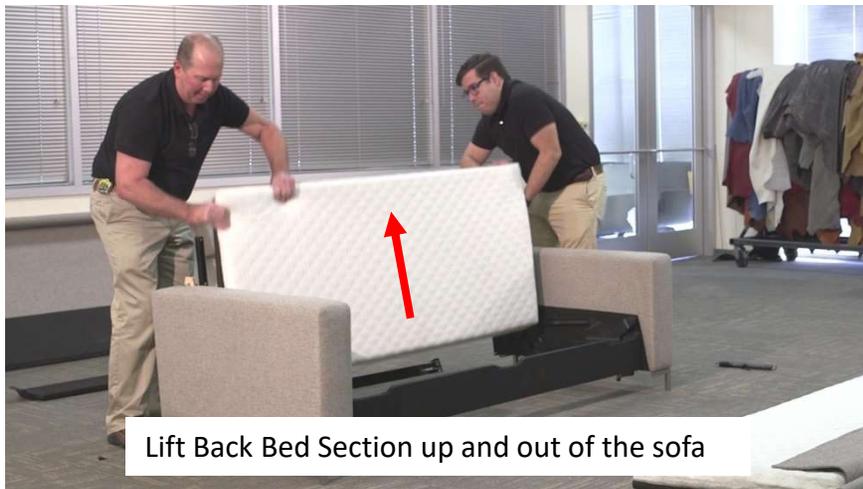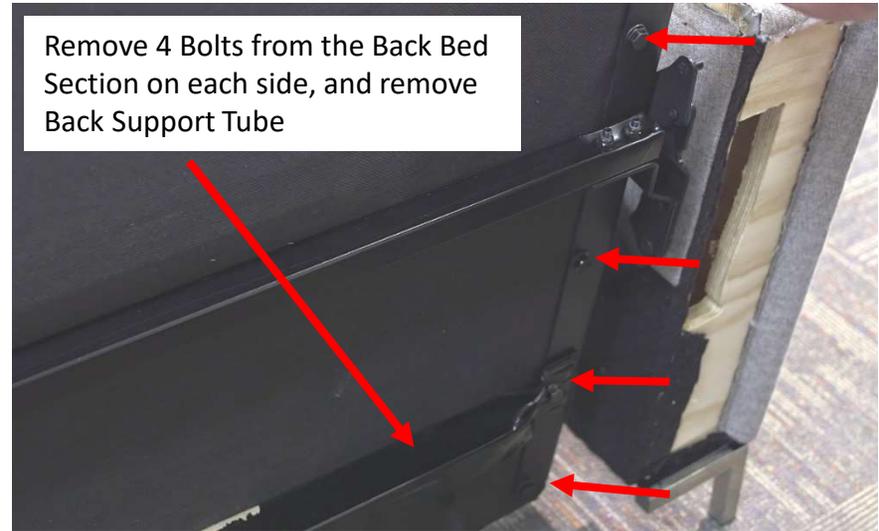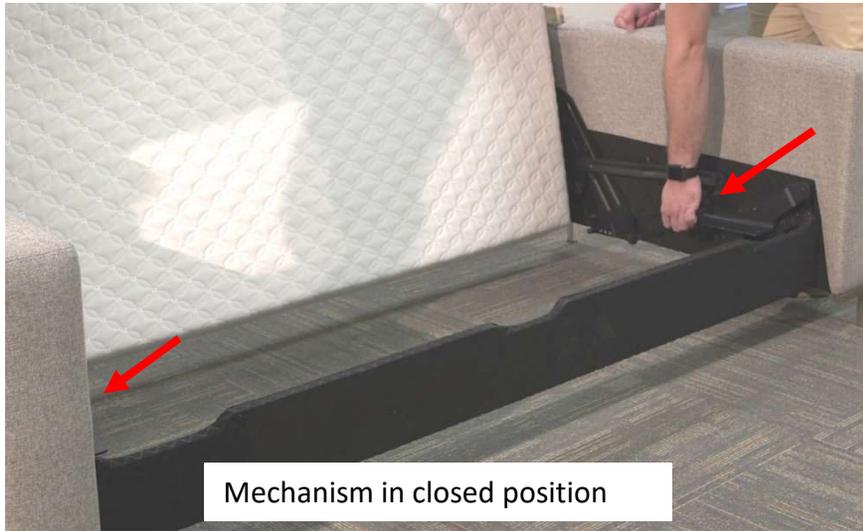

## DISASSEMBLY

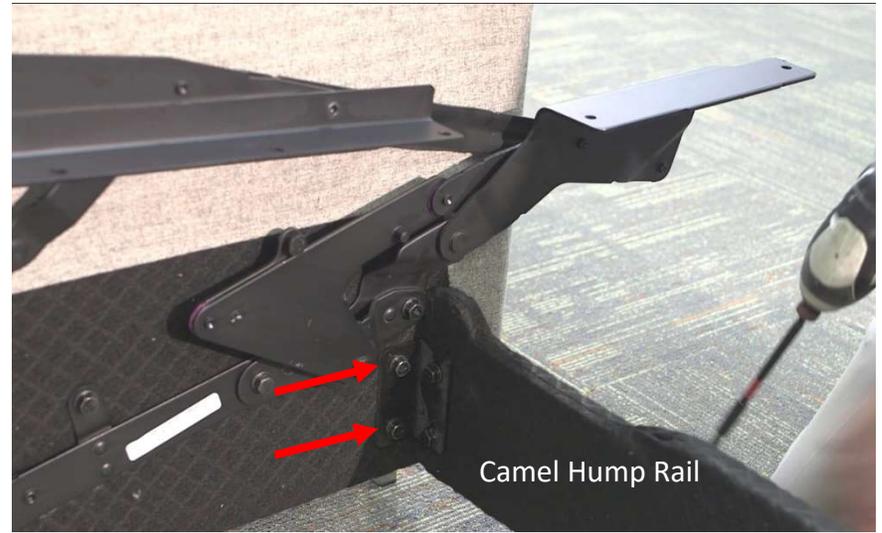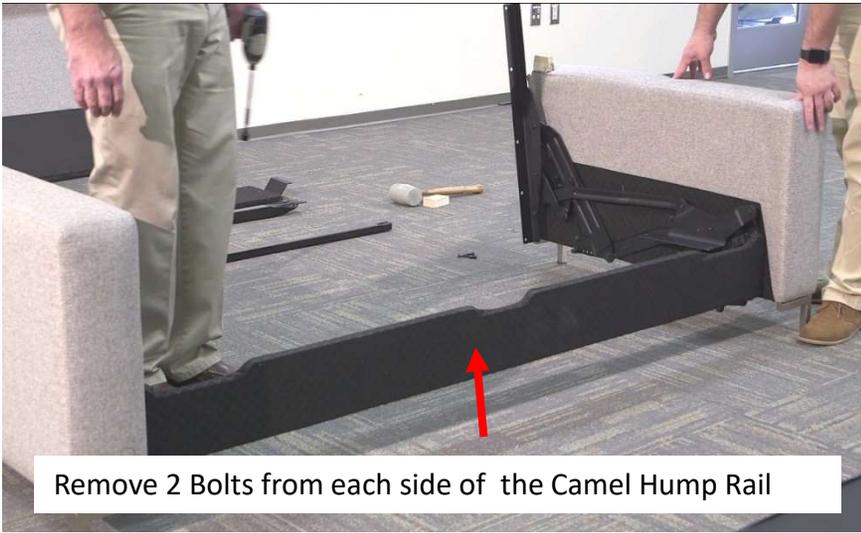



## RESASSEMBLY

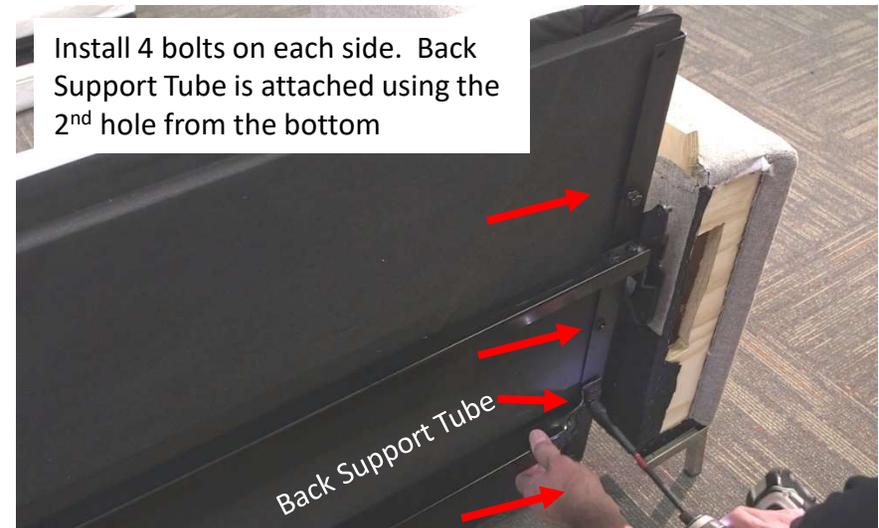


## RESASSEMBLY




Open the Mech and Place Middle and Front Mattress Assembly onto Mech Brackets

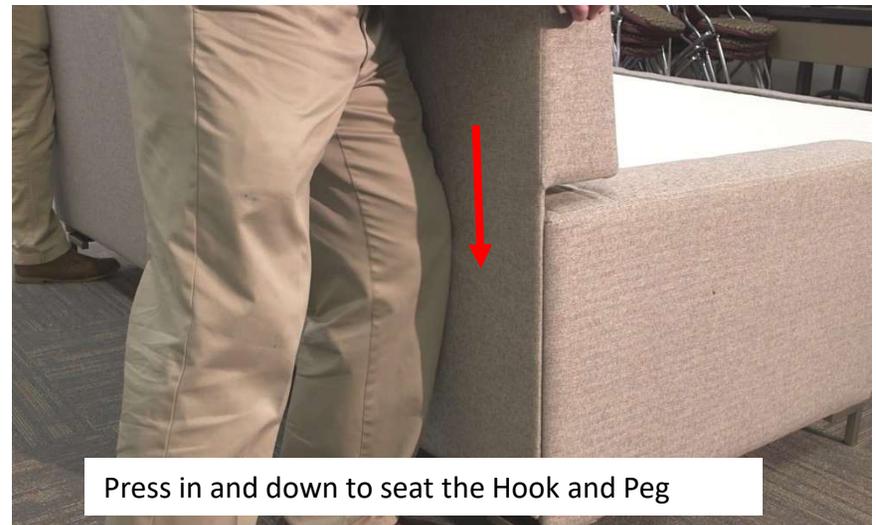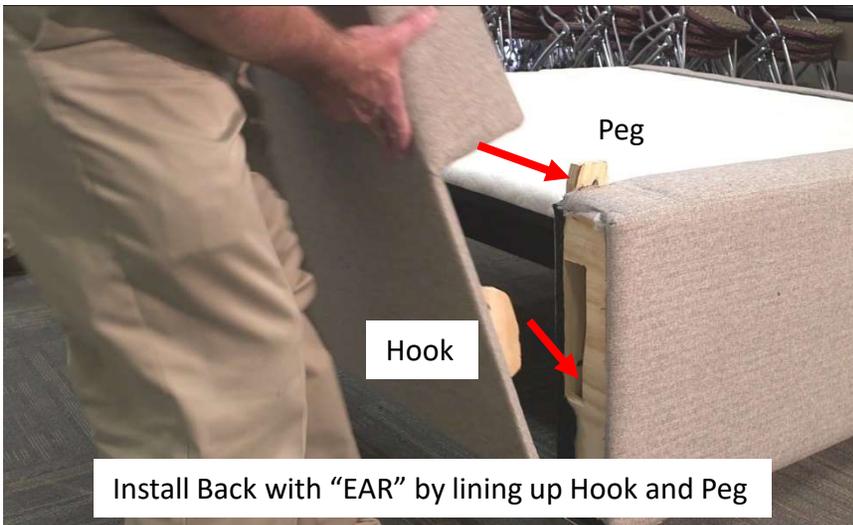

## RESASSEMBLY

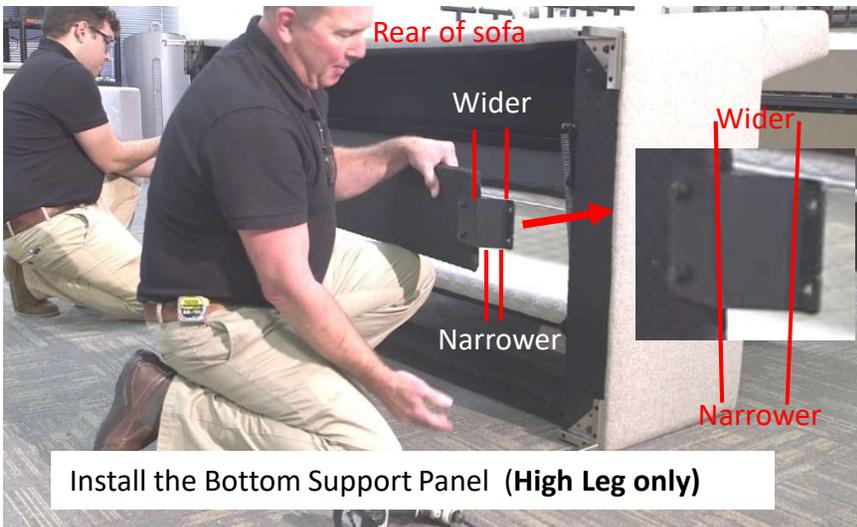

## RESASSEMBLY

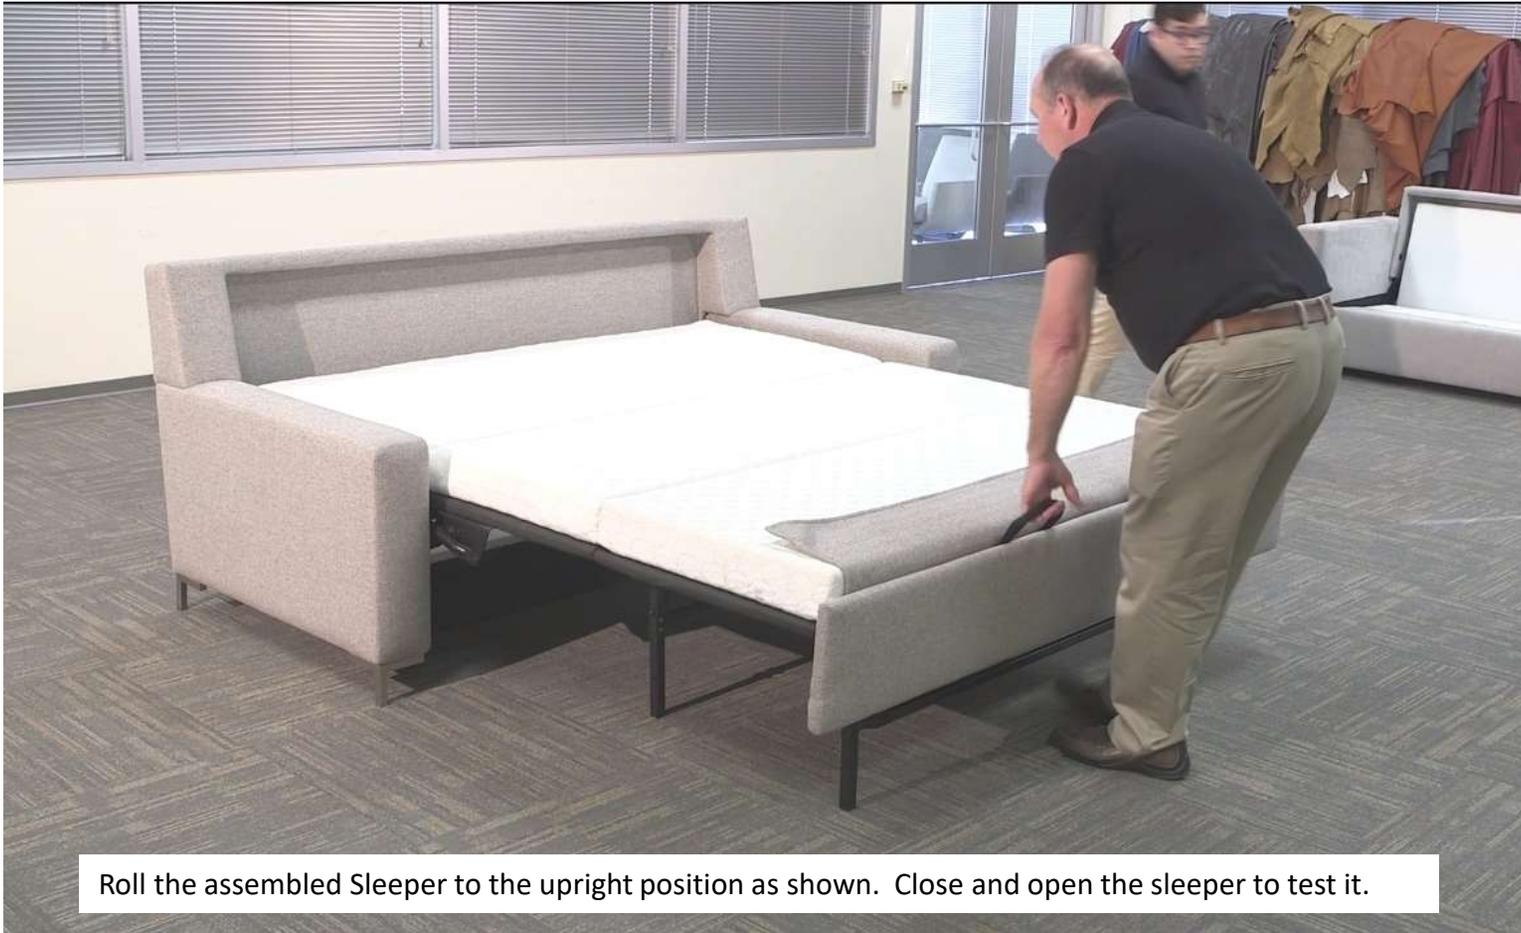


# AMERICAN LEATHER®

## Version 8 Comfort Sleeper Complete Disassembly

No "T" Style Back

### Tools needed to completely disassemble Version 6 Comfort Sleeper:

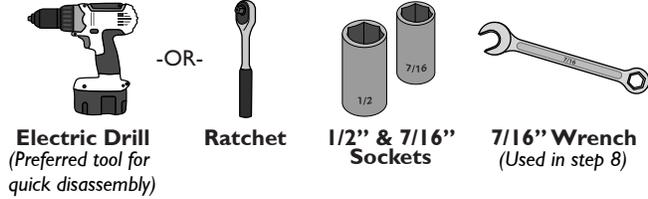

**Electric Drill**  
(Preferred tool for quick disassembly)

**Ratchet**

**1/2" & 7/16" Sockets**

**7/16" Wrench**  
(Used in step 8)

**5/16" Bolt**  
(1/2" Head)




Twenty (20) total 5/16" Bolts removed during disassembly.


**1/4" Bolt**  
(7/16" Head)




Four (4) total 1/4" Bolts removed during disassembly.

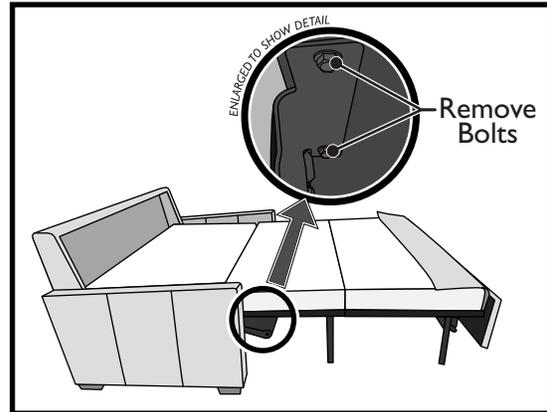


1. To begin, open the comfort sleeper as shown. Remove the two bolts connecting the middle bed section to the mechanism, as shown in the enlarged view. Do this on both the left and right sides.

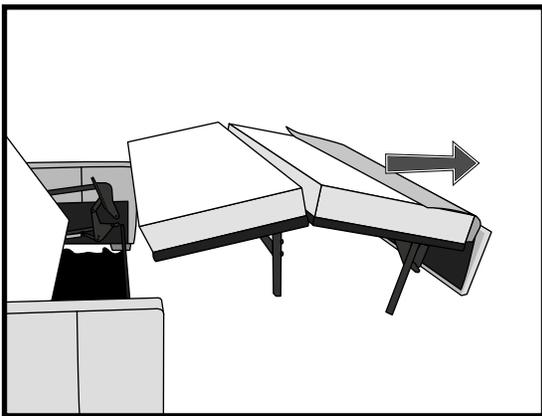


2. With the four (4) bolts removed, lift the front bed sections away from the comfort sleeper and set aside.

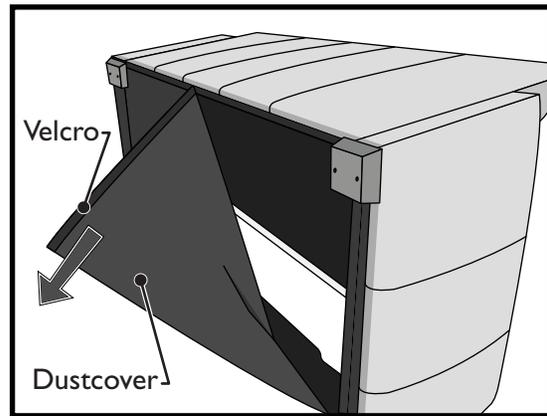

3. Roll the comfort sleeper forward, as shown. Open the dustcover on the bottom by pulling to release the velcro holding it closed.

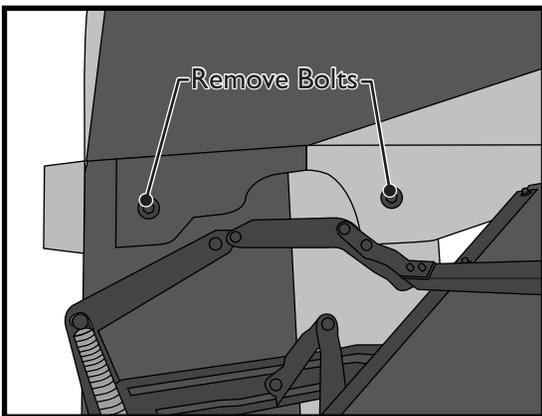

4. With the dustcover open, you have access to the bolts securing the back to the arms. Remove the two bolts, as shown in the figure above, from both sides of the comfort sleeper.

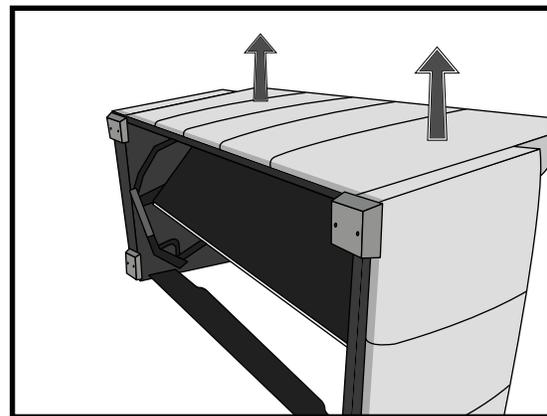


5. With the four bolts removed (from the previous step), the back can now be lifted away from the sleeper and set aside.


# AMERICAN LEATHER®

## Version 8 Comfort Sleeper Complete Disassembly


No "T" Style Back

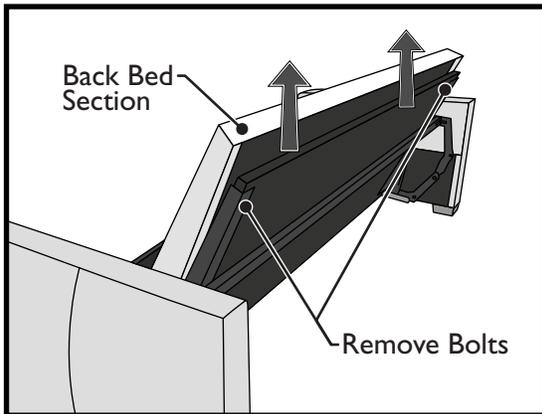

6. Remove (4) four bolts on each side of the comfort sleeper that secure the back bed section to the mechanism. Start from the bottom, leaving a single top bolt on each side. Hold the back bed section while removing the last two bolts. Set the back bed section aside.

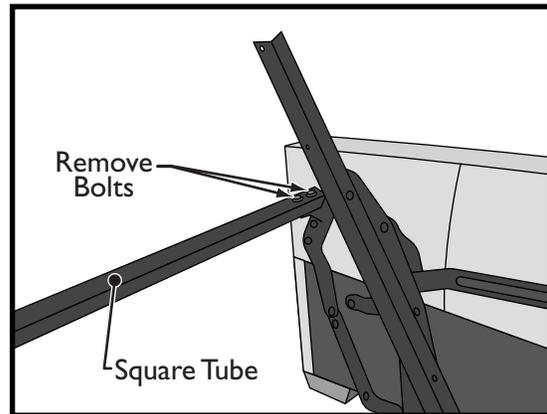


7. To remove the square tube, remove the two bolts on both sides of the comfort sleeper. With all (4) four bolts removed, set the square tube aside.

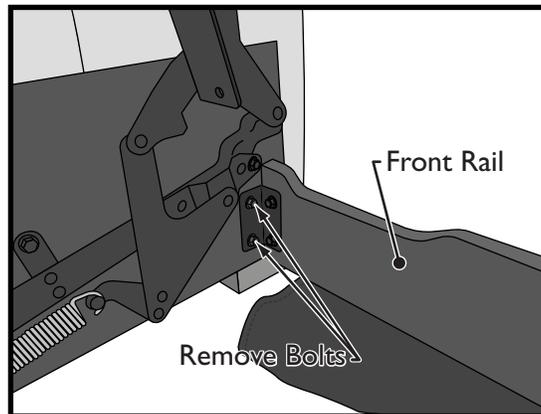

8. Remove the two bolts on each side of the comfort sleeper that secure the front rail to the arm. With the bolts removed, set the front rail aside.


### Completely Disassembled:

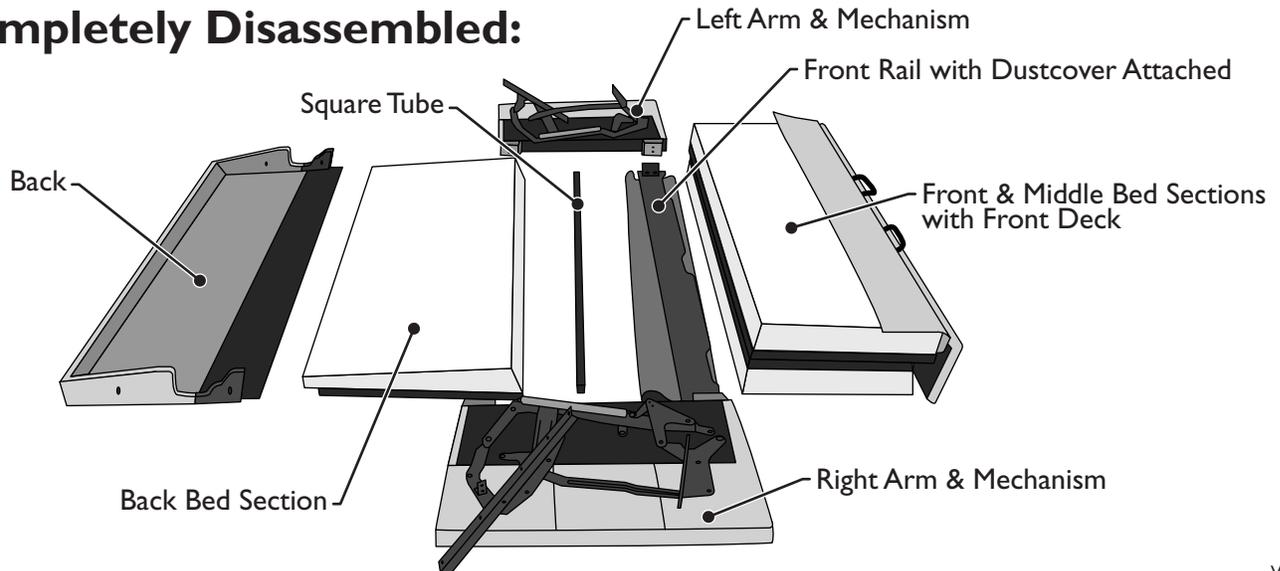




# Version 6 Comfort Sleeper Complete Disassembly


## “T” Style Back

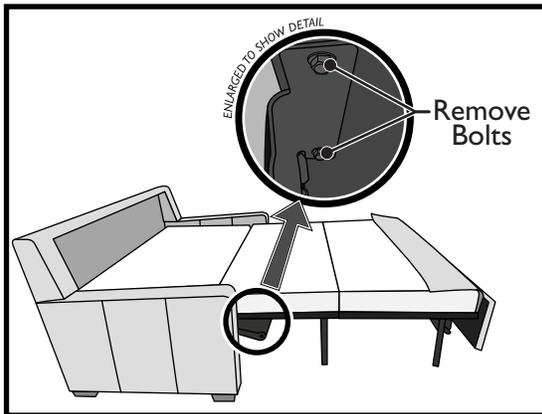


1. To begin, open the comfort sleeper as shown. Remove the two bolts connecting the middle bed section to the mechanism, as shown in the enlarged view. Do this on both the left and right sides.

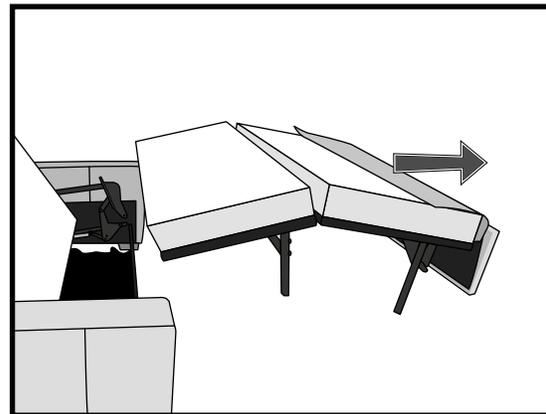


2. With the four (4) bolts removed, lift the front bed sections away from the comfort sleeper and set aside.

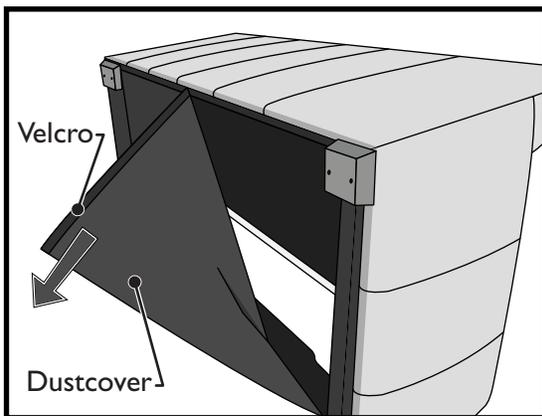


3. Roll the comfort sleeper forward, as shown. Open the dustcover on the bottom by pulling to release the velcro holding it closed.

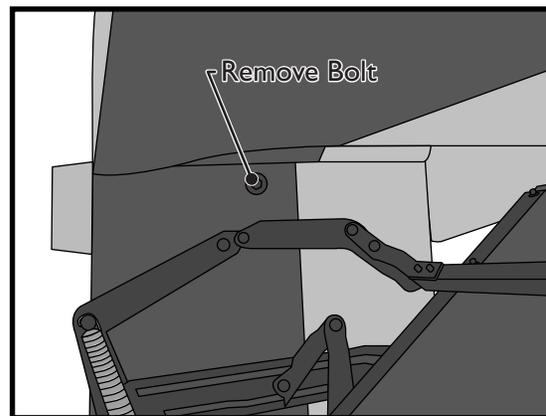

4. With the dustcover open, you have access to the bolt securing the arm to the back. Remove the bolt, as shown in the figure above, from both sides of the comfort sleeper.

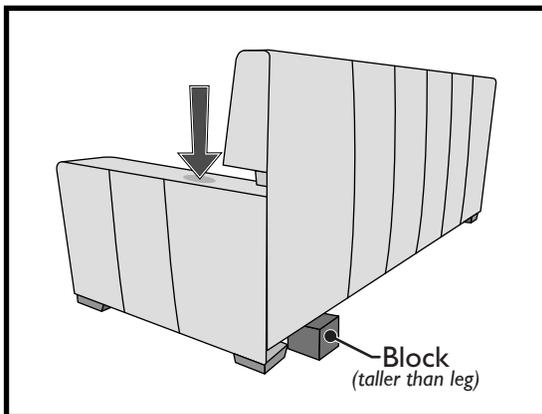

5. Turn the sofa upright and place a block (taller than the sofa leg) under the back near the arm. Press down firmly as shown in the figure above to release the arm from the back.

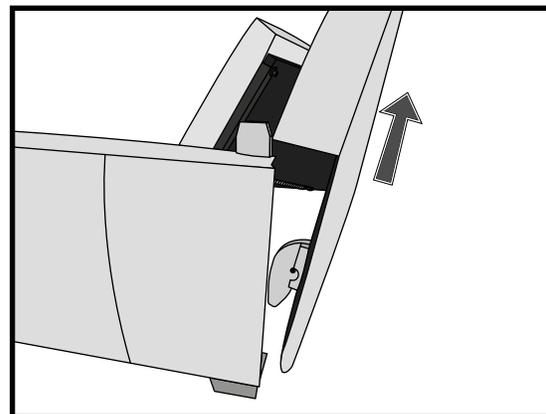


6. Lift the back up and away from the arms. Set the back aside.




# Version 6 Comfort Sleeper Complete Disassembly


## "T" Style Back

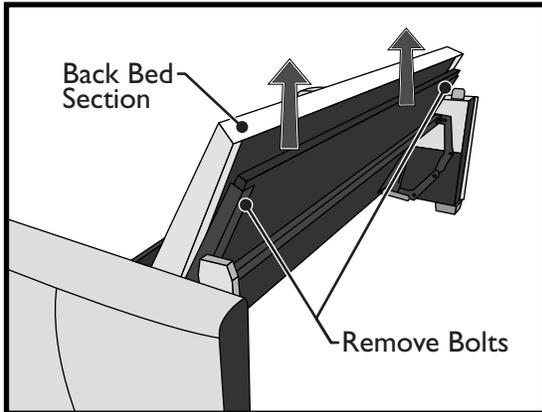

7. Remove (4) four bolts on each side of the comfort sleeper that secure the back bed section to the mechanism. Start from the bottom, leaving a single top bolt on each side. Hold the back bed section while removing the last two bolts. Set the back bed section aside.

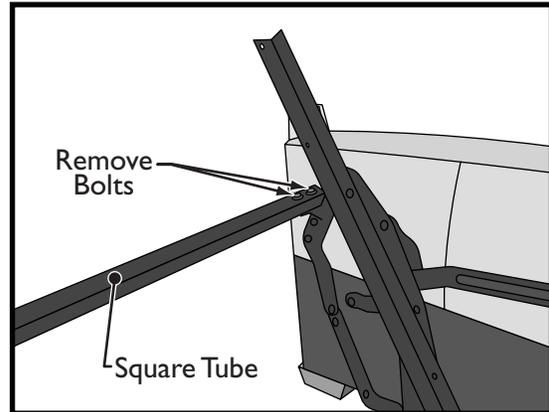


8. To remove the square tube, remove the two bolts on both sides of the comfort sleeper. With all (4) four bolts removed, set the square tube aside.

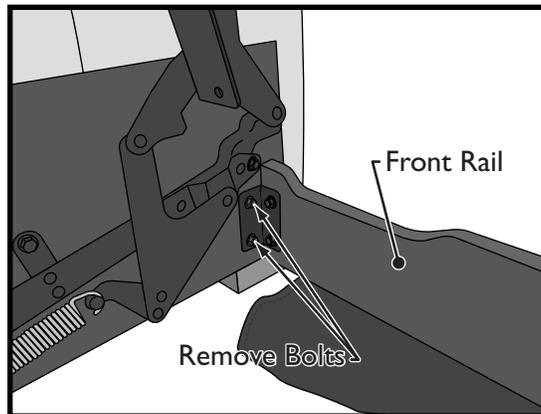

9. Remove the two bolts on each side of the comfort sleeper that secure the front rail to the arm. With the bolts removed, set the front rail aside.

### Completely Disassembled:

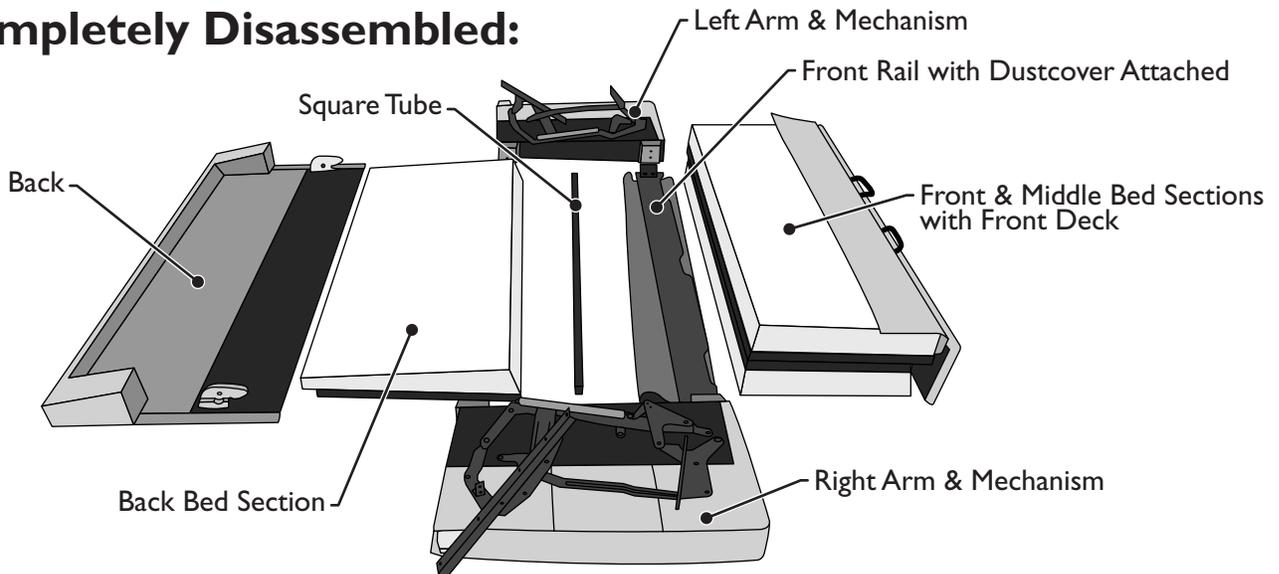




# Version 6 Comfort Sleeper Complete Disassembly


## No "T" Style Back

### Tools needed to completely disassemble Version 6 Comfort Sleeper:

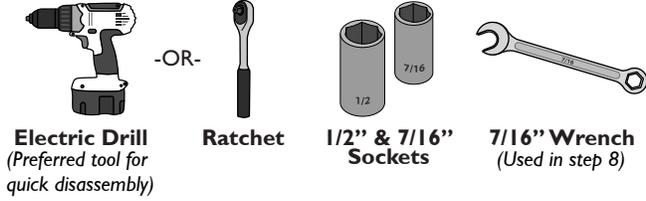


**5/16" Bolt**  
(1/2" Head)  *Twenty (20) total 5/16" Bolts removed during disassembly.*


**1/4" Bolt**  
(7/16" Head)  *Four (4) total 1/4" Bolts removed during disassembly.*

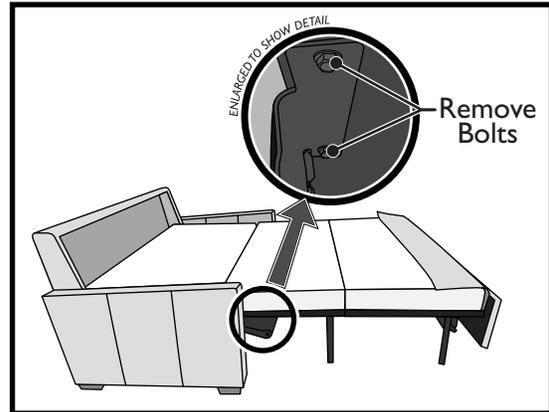


**1.** To begin, open the comfort sleeper as shown. Remove the two bolts connecting the middle bed section to the mechanism, as shown in the enlarged view. Do this on both the left and right sides.

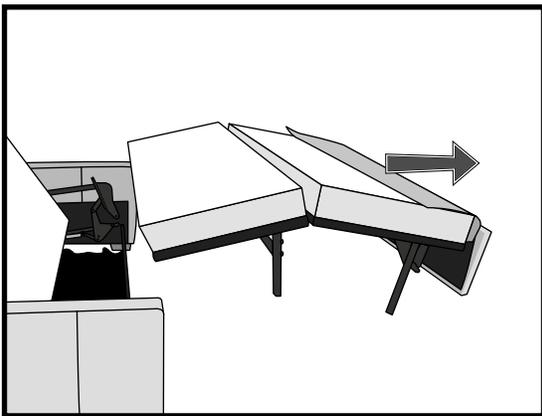


**2.** With the four (4) bolts removed, lift the front bed sections away from the comfort sleeper and set aside.

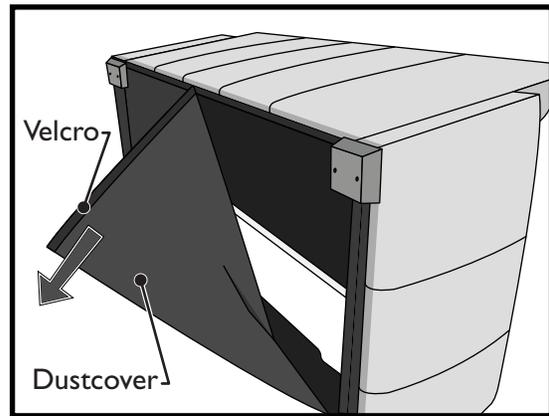

**3.** Roll the comfort sleeper forward, as shown. Open the dustcover on the bottom by pulling to release the velcro holding it closed.

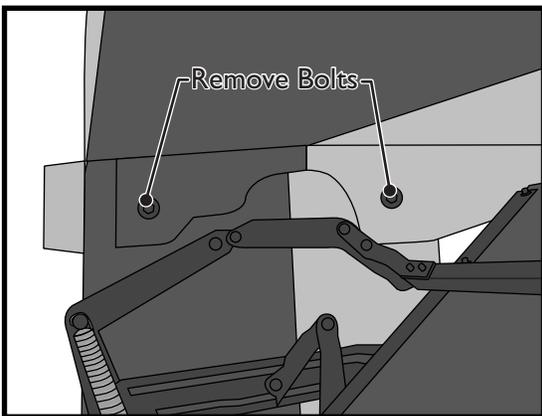

**4.** With the dustcover open, you have access to the bolts securing the back to the arms. Remove the two bolts, as shown in the figure above, from both sides of the comfort sleeper.

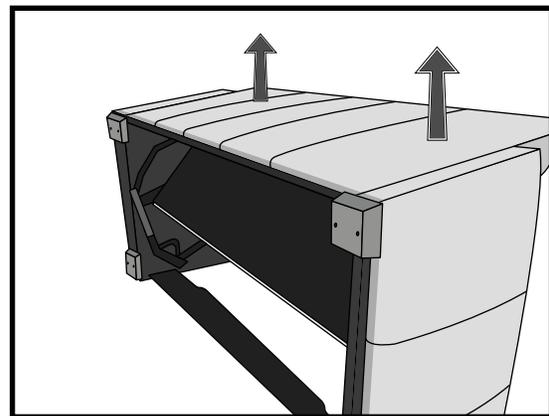


**5.** With the four bolts removed (from the previous step), the back can now be lifted away from the sleeper and set aside.




# Version 6 Comfort Sleeper Complete Disassembly


## No "T" Style Back

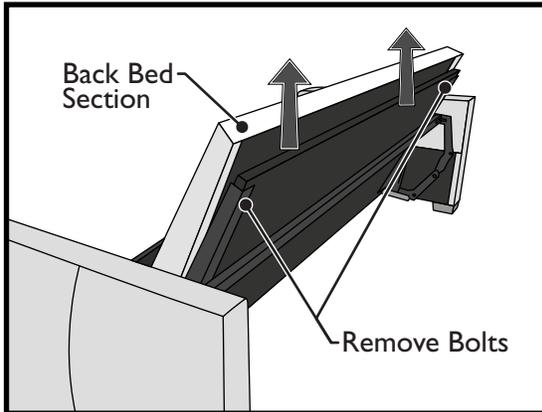

**6.** Remove (4) four bolts on each side of the comfort sleeper that secure the back bed section to the mechanism. Start from the bottom, leaving a single top bolt on each side. Hold the back bed section while removing the last two bolts. Set the back bed section aside.

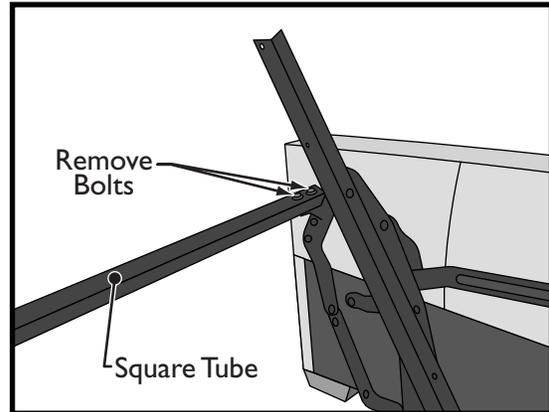


**7.** To remove the square tube, remove the two bolts on both sides of the comfort sleeper. With all (4) four bolts removed, set the square tube aside.

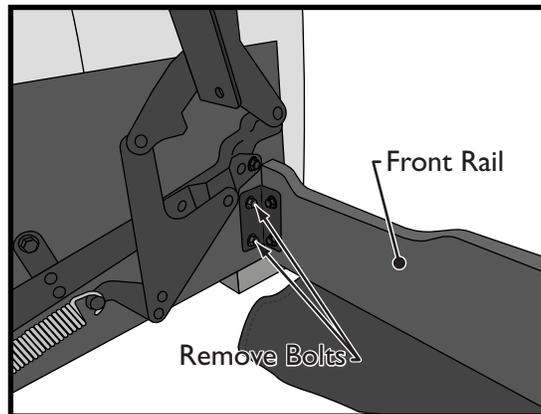

**8.** Remove the two bolts on each side of the comfort sleeper that secure the front rail to the arm. With the bolts removed, set the front rail aside.


### Completely Disassembled:

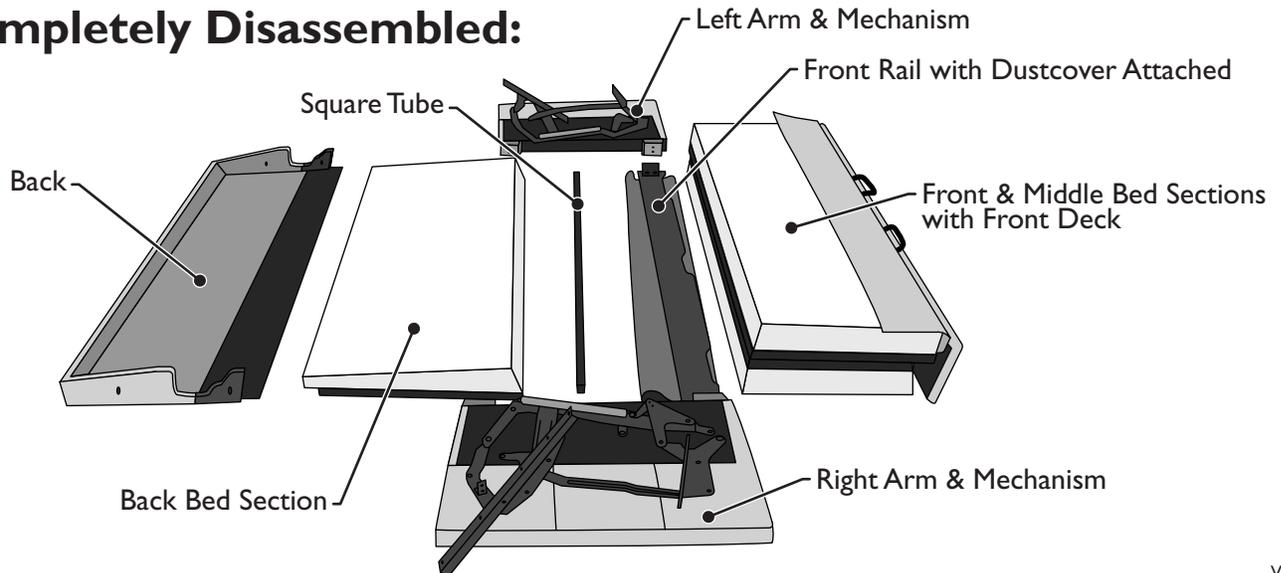




# Version 6 Comfort Sleeper Complete Disassembly


## “T” Style Back

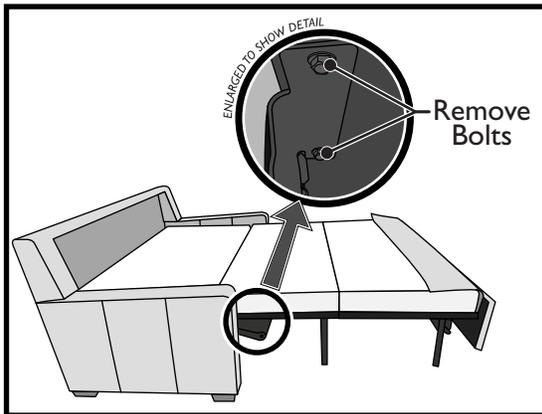


1. To begin, open the comfort sleeper as shown. Remove the two bolts connecting the middle bed section to the mechanism, as shown in the enlarged view. Do this on both the left and right sides.

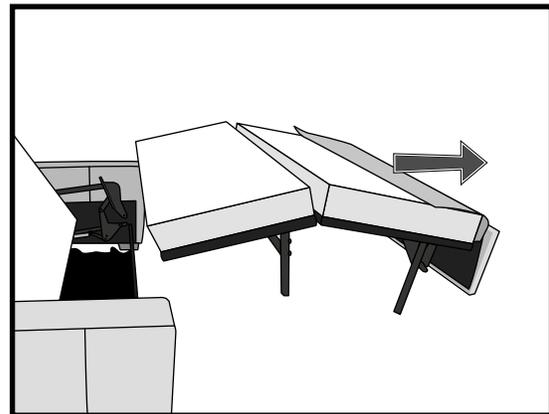


2. With the four (4) bolts removed, lift the front bed sections away from the comfort sleeper and set aside.

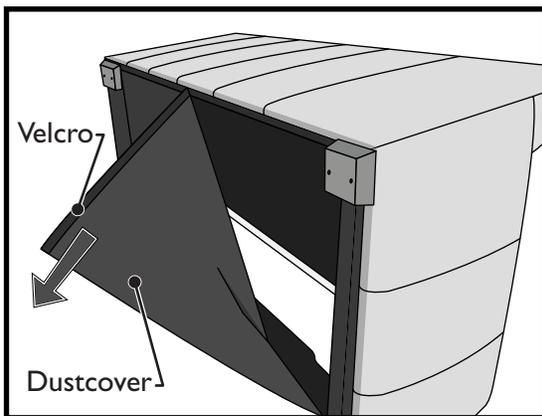


3. Roll the comfort sleeper forward, as shown. Open the dustcover on the bottom by pulling to release the velcro holding it closed.

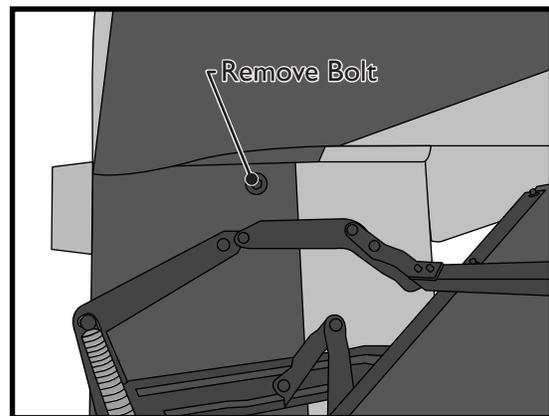

4. With the dustcover open, you have access to the bolt securing the arm to the back. Remove the bolt, as shown in the figure above, from both sides of the comfort sleeper.

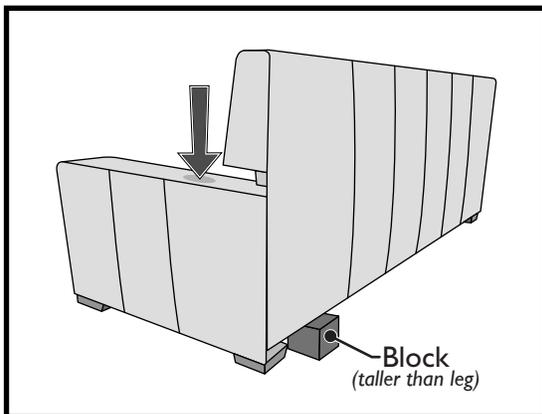

5. Turn the sofa upright and place a block (taller than the sofa leg) under the back near the arm. Press down firmly as shown in the figure above to release the arm from the back.

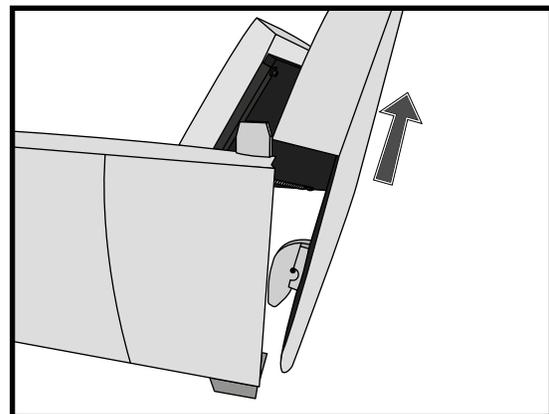


6. Lift the back up and away from the arms. Set the back aside.




# Version 6 Comfort Sleeper Complete Disassembly


## "T" Style Back

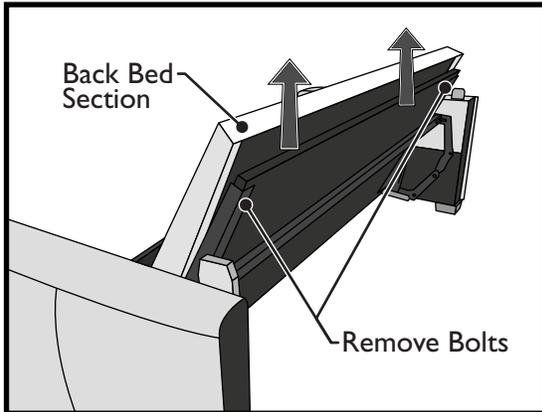

7. Remove (4) four bolts on each side of the comfort sleeper that secure the back bed section to the mechanism. Start from the bottom, leaving a single top bolt on each side. Hold the back bed section while removing the last two bolts. Set the back bed section aside.

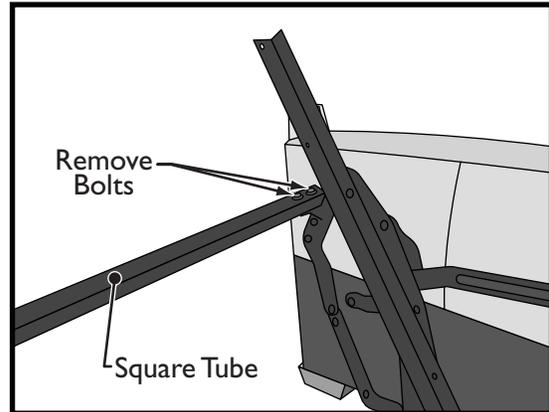


8. To remove the square tube, remove the two bolts on both sides of the comfort sleeper. With all (4) four bolts removed, set the square tube aside.

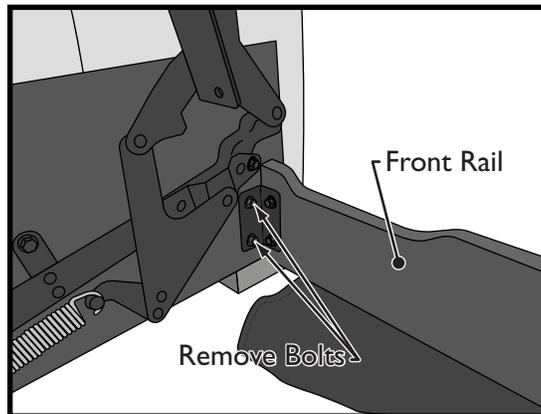

9. Remove the two bolts on each side of the comfort sleeper that secure the front rail to the arm. With the bolts removed, set the front rail aside.

### Completely Disassembled:

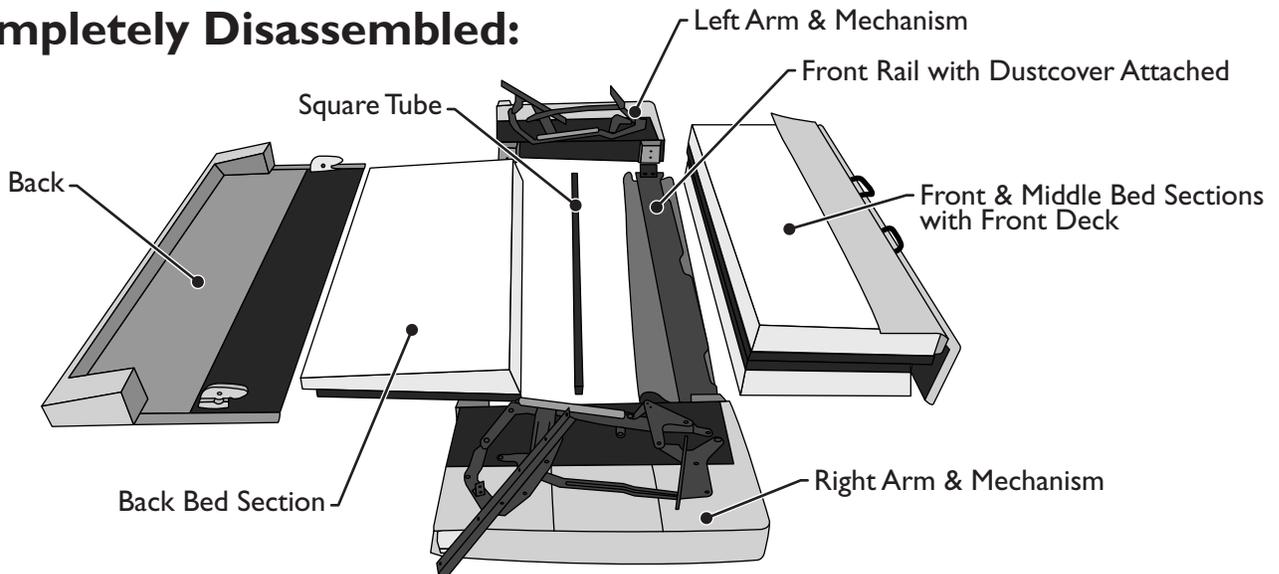





AMERICAN LEATHER®

## Comfort Sleeper Armless


Connecting the armless sides of two comfort sleepers using U-shaped clips

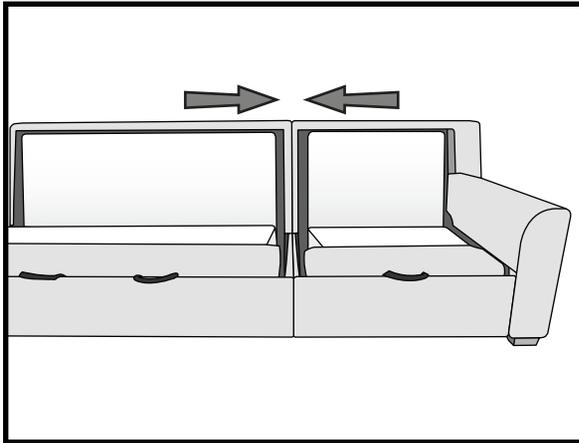

1. Line up the comfort sleepers, and push the armless sides together.

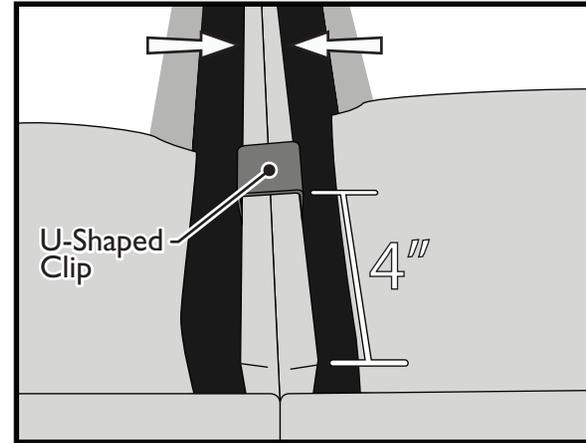

2. Use one hand to squeeze the armless side panels together. Use the other hand to slide the U-shaped clip over both decks as shown. Place the U-shaped clip about four inches from the front of the armless panels as shown in the image above.

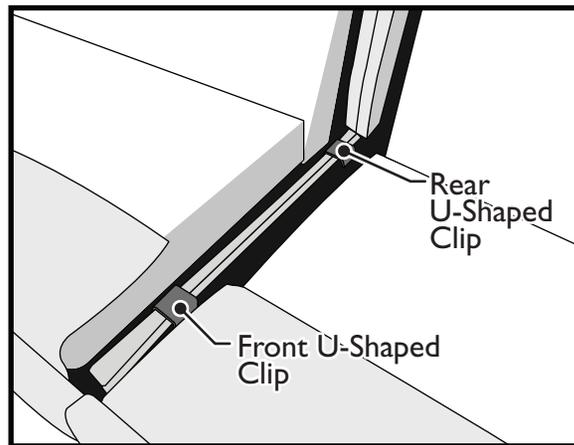

3. Install the second U-shaped clip towards the back of the armless side panels as shown in the picture above. With both U-shaped clips in place, the sectionals will be secure.



# Version 6 Sectional High Leg Comfort Sleeper Back Removal

**NOTE:** Mechanism not shown for clarity purposes

## Tools needed to remove high leg Comfort Sleeper back:



**Electric Drill**  
(Preferred tool for quick disassembly)

-OR-



**Ratchet**




**1/2" Socket**

**5/16" Bolt**  
(1/2" Head)




**Brynlee (BRY):** Four (4) total 5/16" Bolts removed during back removal.

**Hannah (HNH):** Six (6) total 5/16" Bolts removed during back removal.

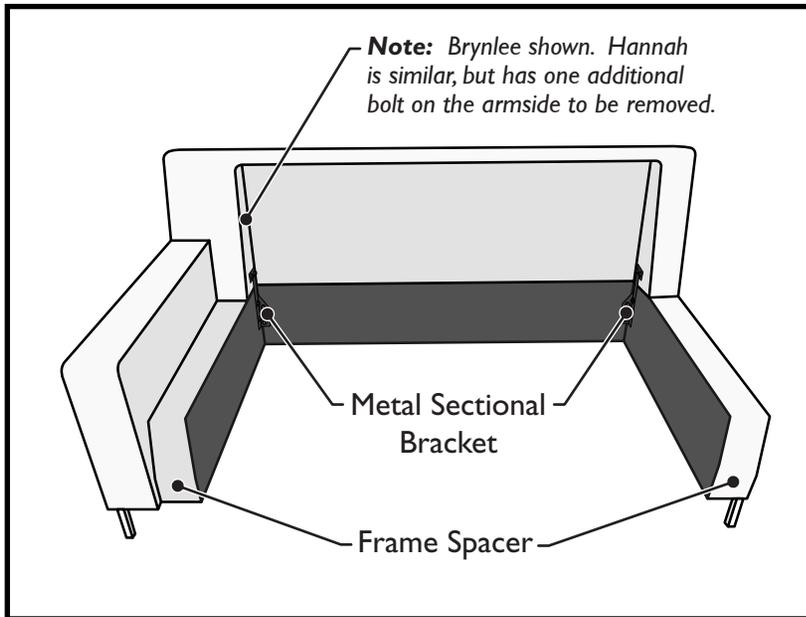

**Figure A.** Sectional Brynlee (BRY) and Hannah (HNH) comfort sleepers have a *frame spacer* on each side, as well as a *metal sectional bracket* on each side. The *metal sectional bracket* secures the back to the *frame spacers*.

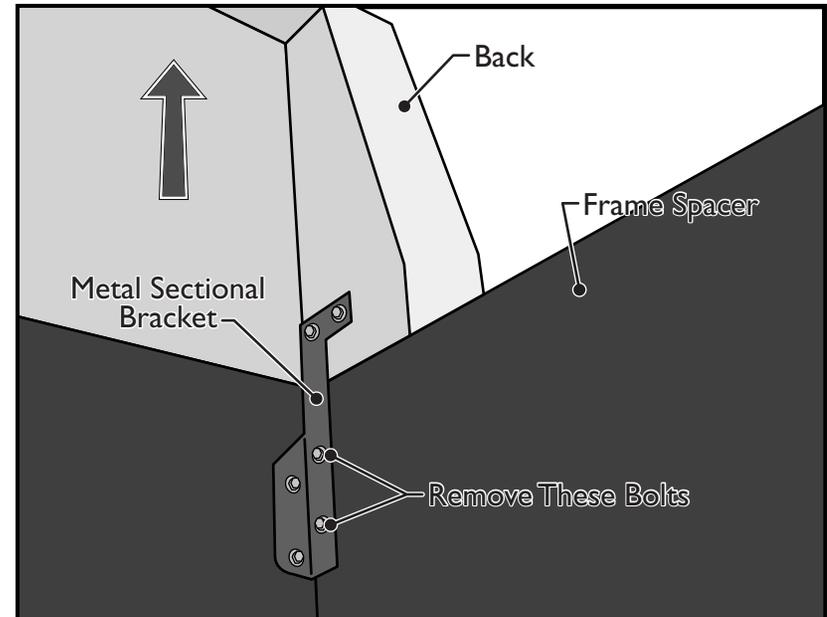

**Figure B.** Remove the two bolts pointed out in image above with a 1/2" socket. Do this for both sides of the back. With all four (4) bolts removed you can lift up the back and remove it from the comfort sleeper.



1. Open bed and roll sofa body forward as shown



2. Release the Velcro holding the dustcover flap to the Back of the sofa and let it lay on the floor



3. Remove bolt(s) on each side of sofa as shown. Sofas where the Back of the sofa does not overhang the Arm have more than one bolt on each side of the sofa



4. Roll the sofa upright and place a block under the back near the sofa leg.



5. Press down on the top arm with your knee to release the Back. Move the block to the other arm and repeat.



6. Lift the Back up and out to remove



7. Reposition back and line up Hooks



8. Press down hard on each side of sofa to attach Back



9. Roll sofa forward as shown



10. Re install bolts



11. Position hands in a wide stance and attach dustcover being careful not to create diagonal wrinkles



12. Open and close sofa to test